

RoHS COMPLIANT







◆ SPECIFICATIONS
 Temperature range: -40°C ~ +125°C
 Material:
 Insulator: PBT UL 94V-0

Ordering code:

E2001H00-NP X-XX-L-NK
 ① ② ③ ④ ⑤

- ① No. of Circuits
- ② X : Product color(A--Y)
 A : Black type
 None : White
- ③ HF : Halogen Free
- ④ L : Lock
- ⑤ NK : No Mark
 Blank : Mark

16P	30.00	32.70	34.10	36.00
15P	28.00	30.70	32.10	34.00
14P	26.00	28.70	30.10	32.00
13P	24.00	26.70	28.10	30.00
12P	22.00	24.70	26.10	28.00
11P	20.00	22.70	24.10	26.00
10P	18.00	20.70	22.10	24.00
9P	16.00	18.70	20.10	22.00
8P	14.00	16.70	18.10	20.00
7P	12.00	14.70	16.10	18.00
6P	10.00	12.70	14.10	16.00
5P	8.00	10.70	12.10	14.00
4P	6.00	8.70	10.10	12.00
3P	4.00	6.70	8.10	10.00
2P		4.70	6.10	8.00
PIN数	A	B	C	D

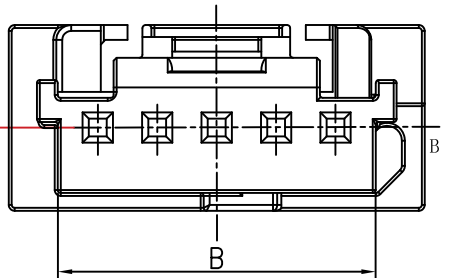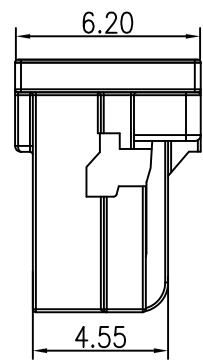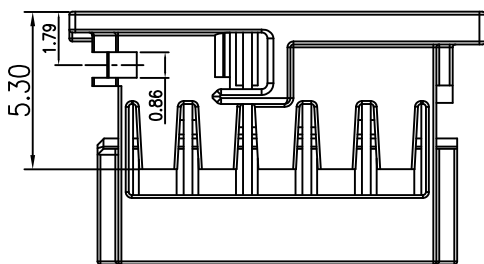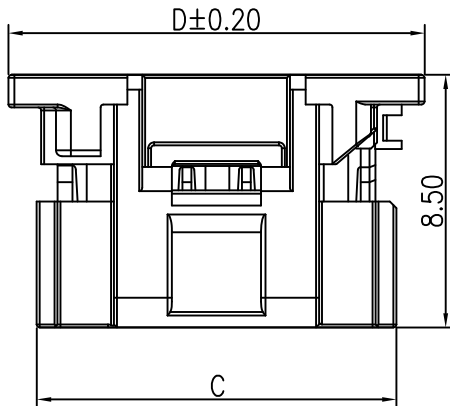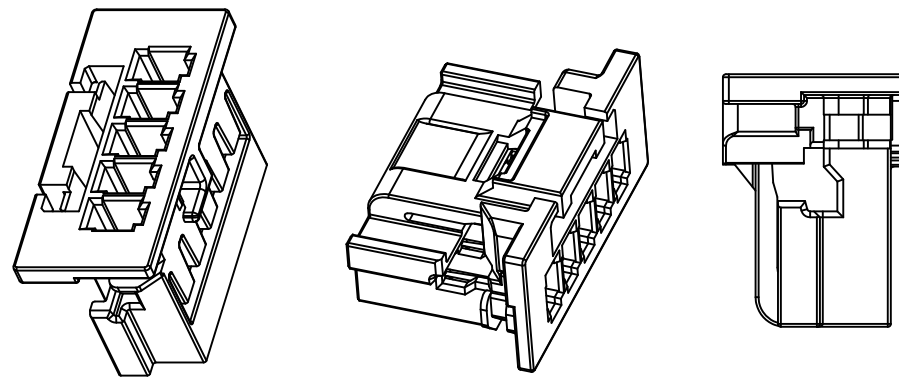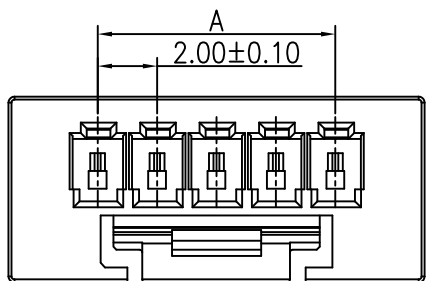

				GENERAL TOLERANCE		UNIT: mm		DATE		TITLE:		东莞市宏欣蓝电子有限公司			
				.X ± 0.30	X° ± 3'	DRAWN: WESLEY		2019.10.19		MX2.0内扣 Housing					
				.XX ± 0.25	.X° ±	CHECKED:				VER. SCALE: 1:1		PROJECT	PART NO.	E2001H00-NPX-XX-L-XX	
				.XXX ± 0.10	.XX° ±	APPROVED:				A1 SHEET: 1/4		DRAWING NO.		E2001HL	
LTR	ECN NO.	NAME	DATE	VERISION RECORD											

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作








RoHS
COMPLIANT

Material:
Insulator: PBT UL 94V-0
COLOR: GRAY

Ordering code:

E2001L-NP X-XX-NK
① ② ③ ④

- ① No. of Circuits
- ② X : Product color(A--Y)
A : Black type
None : White
- ③ HF : Halogen Free
Blank : Mark
- ④ NK : No Mark
Blank : Mark

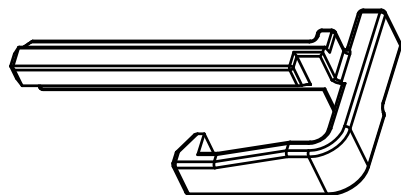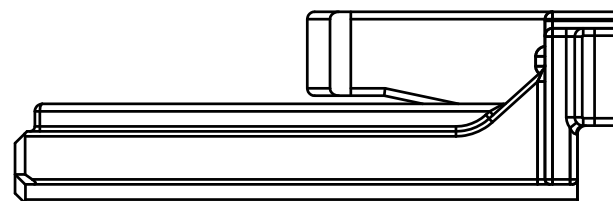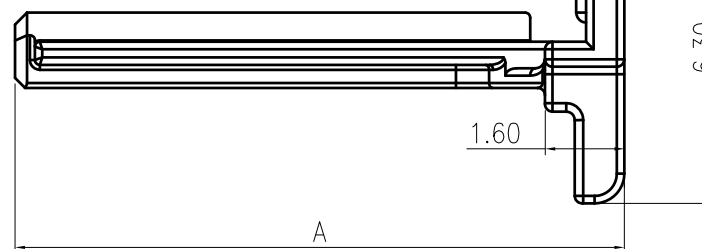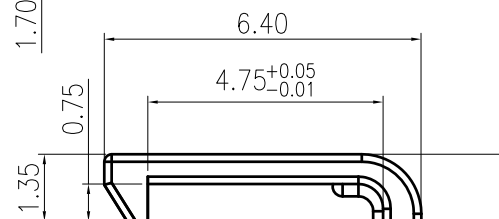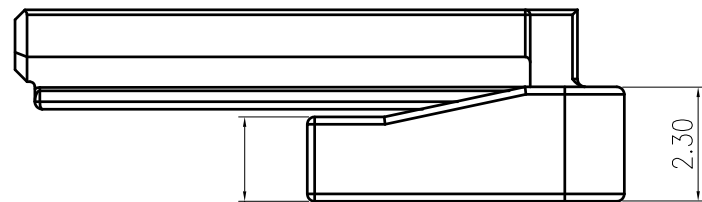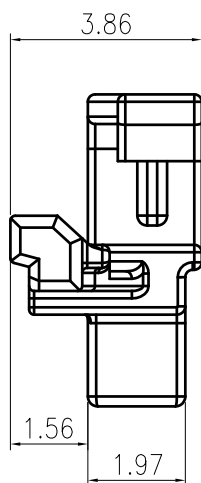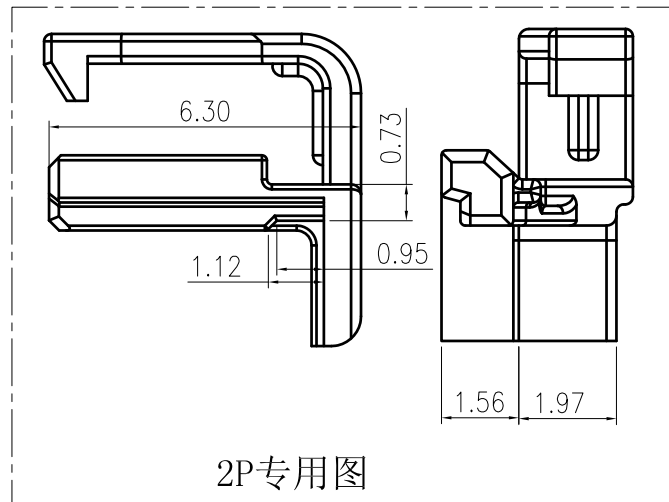

				GENERAL TOLERANCE		UNIT: mm		DATE		TITLE:			东莞市宏欣蓝电子有限公司			
				.X ± 0.30	X° ± 3'	DRAWN: WESLEY		2019.10.19		MX 2.0 HSG LOCK						
				.XX ± 0.25	.X° ±	CHECKED:				VER.	SCALE:	1:1	PROJECT	PART NO.	E2001L-NPX-XX-XX	
LTR ECN NO. NAME DATE VERISION RECORD				.XXX ± 0.10	.XX° ±	APPROVED:				A1	SHEET:	1/4	DRAWING NO.	E2001L		

由 Autodesk 教育版产品制作








由 Autodesk 教育版产品制作

RoHS
COMPLIANT

◆ SPECIFICATIONS



- Current rating: 3A(AWG 22~30#) AC, DC
- Voltage rating: 125V AC,DC
- Temperature range: -40°C ~ +125°C
- Insulation resistance: 1000mΩ Min.
- Withstanding voltage: 1500V AC/ minute.
- Contact resistance: 10mΩ Max.

Material: Phosphor Bronze
Finish: 100-150u" TIN plated over
50-80u" Nickel
Qty/reel: 10,000PCS

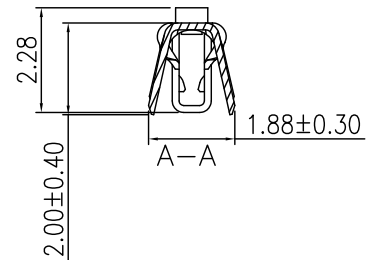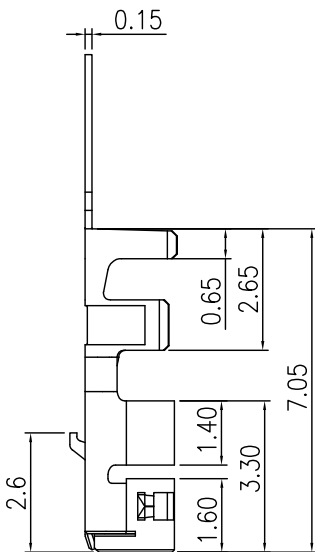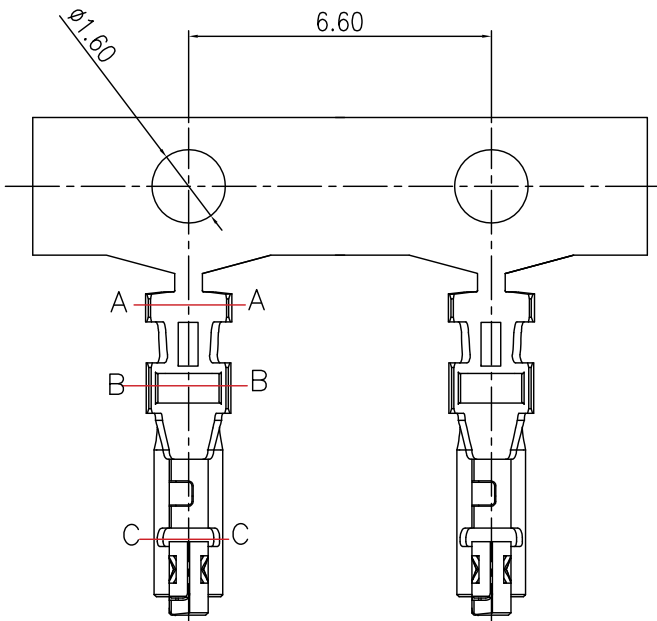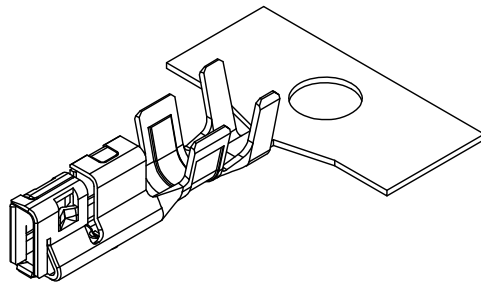

				一般公差		单位: 毫米(mm)		日期		品名规格:		
				.X±0.30	X°±2°	制图: WESLEY		2019.03.08		MX2.0内扣 Terminal		
				.XX±0.20	.X°±1°	审核:				版本	比例	1:1
				.XXX±0.10	.XX°±	核准:				A1	页数	1/1
标识	ECN NO.	变更人	日期	内容				投影视角	料号	E2001T0P-2E-L-NK		
1	2	3	Autodesk 教育版产品制作				6	7	8	E2001TL		




东莞市宏欣蓝电子有限公司



图号

E2001TL

RoHS
COMPLIANT

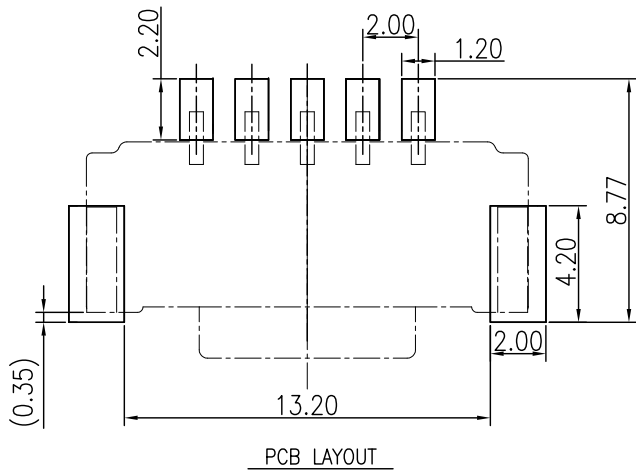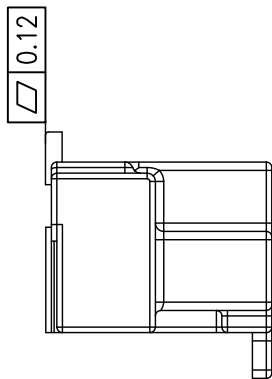

◆ SPECIFICATIONS

- Current rating: 3A AC, DC
- Voltage rating: 125V AC, DC
- Temperature range: -40°C ~ +125°C
- Insulation resistance: 1000mΩ Min.
- Withstanding voltage: 500V AC/ minute.
- Contact resistance: 10mΩ Max.

Material:

Insulator: Nylon 9T UL 94V-0





Pin: Brass

Plating: Tin plated over Nickel

Ordering code:

E12001W00-NP-S X X X XX- L
①②③④⑤

- ① N=Halogen Free R=RoHS
- ② Material: 9=Nylon 9T L=LCP
- ③ Color: B=Black E=Beige
- ④ Plating code: T1=Tin plated
G1=Gold-flash
- ⑤ L: Lock

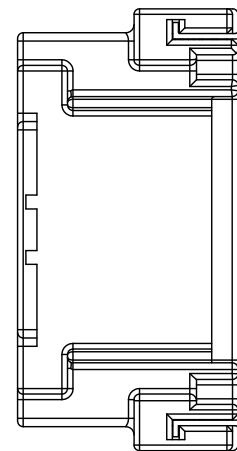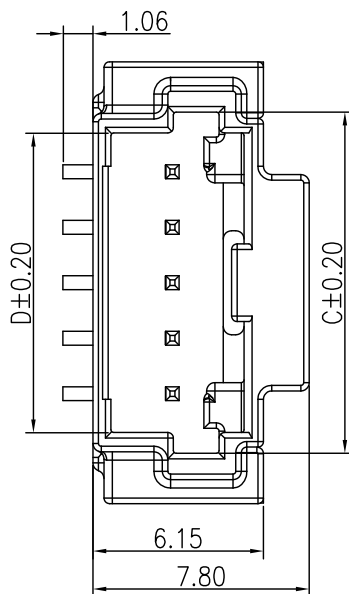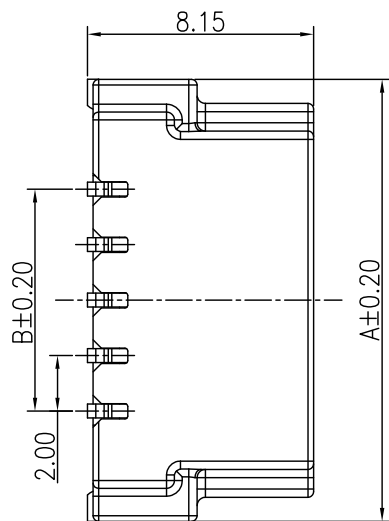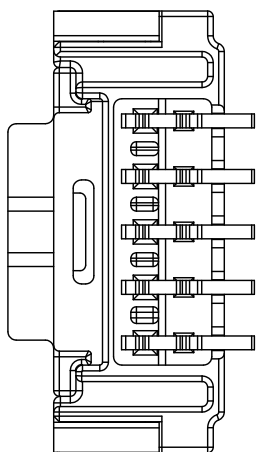

16P	37.90	30.00	34.30	32.80
15P	35.90	28.00	32.30	30.80
14P	33.90	26.00	30.30	28.80
13P	31.90	24.00	28.30	26.80
12P	29.90	22.00	26.30	24.80
11P	27.90	20.00	24.30	22.80
10P	25.90	18.00	22.30	20.80
9P	23.90	16.00	20.30	18.80
8P	21.90	14.00	18.30	16.80
7P	19.90	12.00	16.30	14.80
6P	17.90	10.00	14.30	12.80
5P	15.90	8.00	12.30	10.80
4P	13.90	6.00	10.30	8.80
3P	11.90	4.00	8.30	6.80
2P	9.90	2.00	6.30	4.80
PIN数	A	B	C	D

一般公差		单位: 毫米(mm)		日期		品名规格:	
.X±0.30	X°±2°	制图:	WESLEY	2019.10.19	MX2.0内扣 SMT 180° Wafer		
.XX±0.25	.X°±1°	审核:			版本	比例	1:1
.XXX±0.10	.XX°±	核准:			A1	页数	1/1
标识	ECN NO.	变更人	日期	内容			

东莞市宏欣蓝电子有限公司

投影视角	料号	E2001W00-NP-SXXXXX-L
	图号	E2001W00-L

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作